

The Domino A100

First choice for basic coding

Essentials for Reliability

◆ Reliability Comes As Standard

Whatever your production cycle demands the Domino A-Series will print dependably, ensuring maximum productivity with minimal operator intervention.

◆ Consistent Print Quality

Whether running continuously or shutting down daily, the A-Series printhead technology delivers precise print every time.

◆ Responds to the Environment

Intelligent system designs allow the product to perform in a wide range of environments, minimising the effects of temperature and humidity.

◆ Flexible Installation

A-Series printers can be installed with only an electrical connection required, eliminating the need for a factory air supply.

◆ It Cleans Itself!

Unique ink system design using large internal reservoirs and a nozzle seal allows the A-Series to have truly automatic printhead cleaning giving unrivalled start up and shut down time after time.

◆ Easy to Use

One button controls the complete start up and shut down process, eliminating potential operator errors and possible delays associated with manual printhead cleaning. Codes are simple to set up using the full sized keyboard and display. Topic keys provide operators quick access to the most regularly used functions.

◆ Code Confidently

The real time message monitor displays codes as they are printed and can be viewed at any time to make sure that the right code is on the right product at the right time.

General Purpose

Rugged cabinet constructed in 304 grade stainless steel is suitable for use in a wide range of general manufacturing environments. The easy to wipe clean IP53 cabinet is splash and dust proof.

Simple to Use

Easy to operate, easy to read backlit display with big button keyboard provides access to intuitive control and data entry software. Most commonly used functions are made accessible using topic keys.

Add Fluids in Seconds

Colour coding and sealed container design make sure that the right fluids are fitted without spills.

Flexible Applications

The A100 can print up to 2 lines with a variety of print formats which include logos, automatic serial numbering/batch coding and real time clocks.



Reliable Start Ups

Domino provides the only sealed nozzle technology on the market ensuring clean dependable start up even after extended periods of shutdown.



Flexible and Reliable Installations


Optimum reliability is achieved through the use of surface mount technology and PCMCIA cards for fast configuration and programming.



Electrical components of many types can be coded




High quality coding can mark products without spoiling their consumer appeal



Continuous marking at high or low duty cycles



Automotive products come in all shapes and sizes but can all be successfully coded with Domino ink jet printers

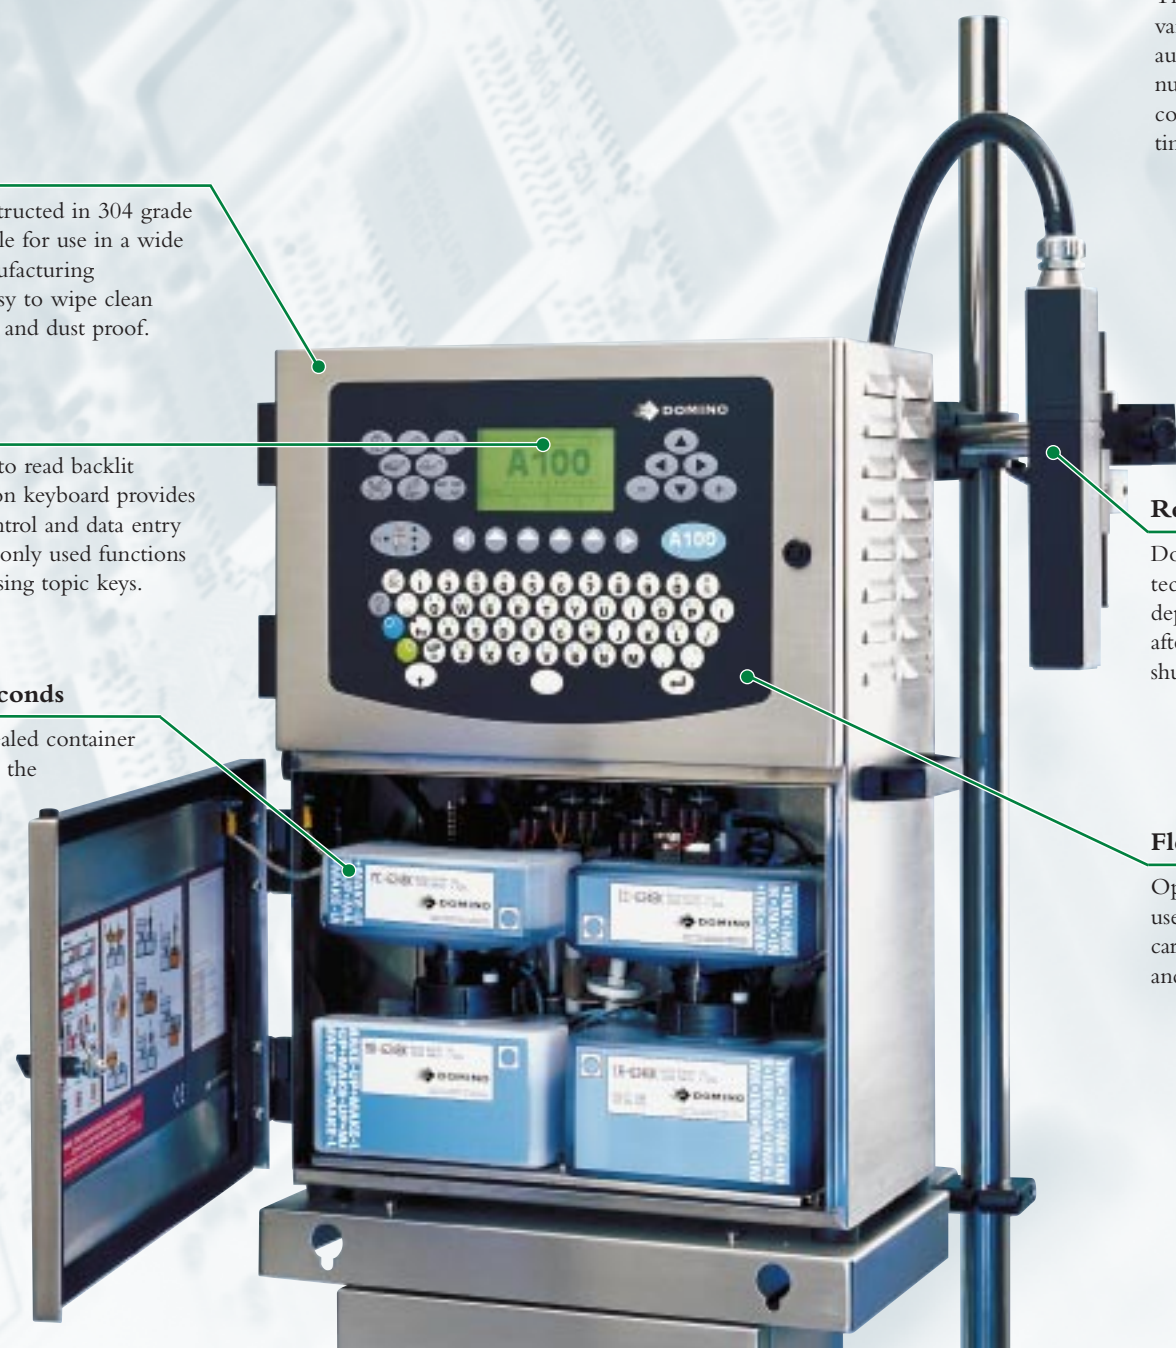

DOMINO A100 A-SERIES
abcdef9 1234567



The Domino A100

Control Unit

Control Panel: Membrane touch button
 Cabinet: Stainless Steel (304) designed to IP53. (BS EN 60529:1992)
 Cabinet dimensions: 245mm x 450mm x 650mm (9.6" x 17.7" x 25.6")
 Weight: 33kg (73lbs)

Character Control

- ◆ Auto repeat
- ◆ Auto invert/reverse
- ◆ User defined clock format
- ◆ Sequential/batch numbering
- ◆ Inverse reverse and bold characters
- ◆ Character width and height adjustment
- ◆ Print delay
- ◆ Product counter
- ◆ Message repeat

Data Input Options

Serial RS232
 Serial RS485
 Rate: 110-38.4k Baud, software configurable

Ink System

Viscosity control: Automatic
 Ink bleed control: Automatic on start up
 Ink and make-up refill: 825ml (.87qt) cartridge automatically metered
 Peltier: Optional

Printhead

Dimensions: 240mm x 41mm x 47mm (9.45" x 1.61" x 1.85")
 Conduit length: 3m (11.8")
 Positive air: Optional internal supply

Environment

Temperature range: 5 - 45°C (40 - 112°F) operating
 Humidity: 10 - 90% (non-condensing)
 Electrical requirements: Single phase, fully auto-ranging
 90 - 132V/180 - 264V, 50/60Hz 200VA

Standard Connections

Product detector: 12V 100mA for photocell or proximity detector. IP68 6 way socket
 Shaft encoder input: Open collector or TTL encoder
 12V via IP68 6 way socket



Options

Alarm beacon connector: IP68 7 way socket
 Auxiliary alarms connector: IP68 9 way plug
 User port connector: IP68 25 way socket

Accessories

Full range of photocells, stands and bracketry

Dimensions

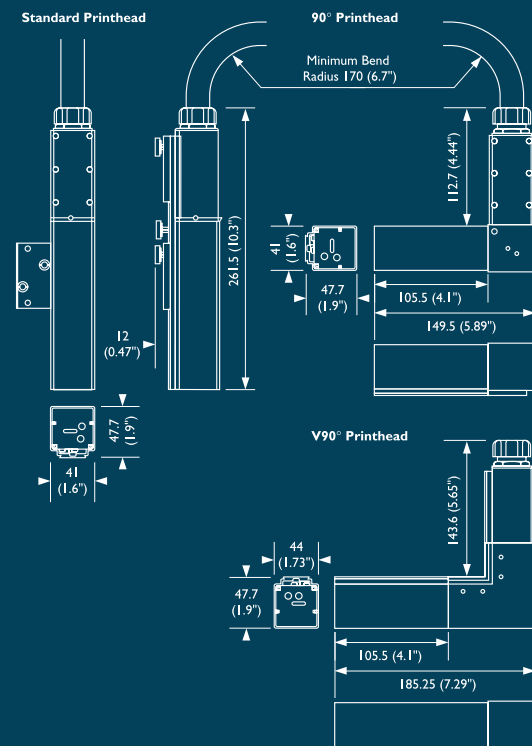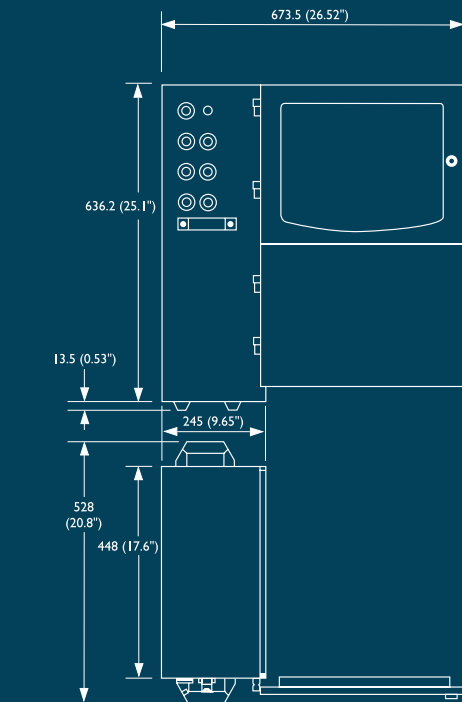

Domino UK Ltd
 Bar Hill
 Cambridge CB3 8TU
 Tel: +44 (0)1954 782551
 Fax: +44 (0)1954 782874
 Web: www.domino-printing.com

Domino Amjet Inc.
 1290 Lakeside Drive
 Gurnee, Illinois 60031
 Tel: +1 800-323-4754
 Fax: +1 847-244-2645
 Web: www.dominoamjet.com



UK: Cert. No. FM 13758
 BS EN ISO 9001



USA: Cert. No. FM 23343
 BS EN ISO 9002

